

Installation Instruction


LED Escape Sign - Recessed



Product description


Model:	LX070R or LX150R
Input Voltage:	AC90~240V / 50~60HZ
Power:	4W
LED light color:	White
Viewing distance:	> 24M
Material:	Flame retardant ABS plastic
Lifespan:	+ 40.000 hrs
Certification:	CE approved and RINA
Protection:	IP44

1

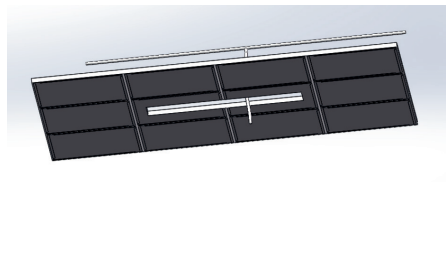


Open a slot of 340 x 63 mm on the ceiling, and lead out the wire.

2

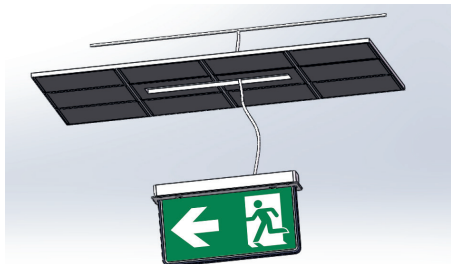


Connect the lead wire to the external lead wire of the sign (pay attention to the corresponding connection of live wire/neutral wire).

3

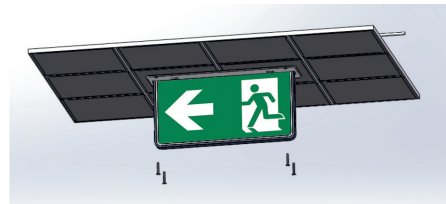

Plug the wire into the slot and use self-tapping screws to secure the sign to the ceiling .

4

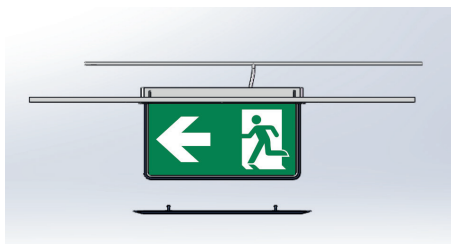

Fasten the panel upwards and press gently to fix it.

5



After finishing installation, turn on power to examine whether the sign can work normally.