

Datasheet

Lifejacket Light



T-ISS™
safety suppliers

a Heijboer Safety Group company


Product description

The T-ISS LED Lifejacket Light automatically activates when the lifejacket comes into contact with water. It features an off function and a clip for easy attachment to almost any lifejacket.

The light is powered by a maintenance-free alkaline battery. Its fully sealed and tamper-proof construction protects the internal components.

The light can be switched off using the button on the front. Once the contacts are dry, splashing them with water reactivates the automatic function. Instructions are clearly marked on the label.

Product Image

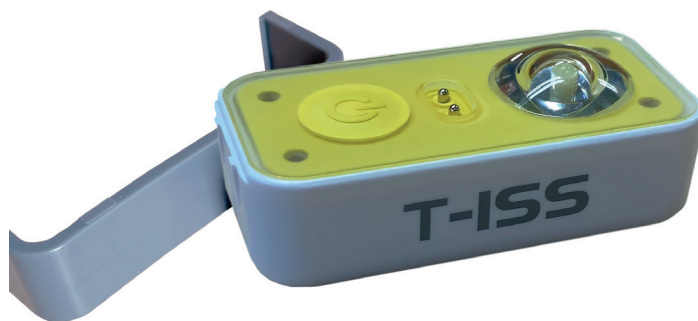

Technical Specifications

Dimensions:	62 × 30 × 22 mm
Weight:	Approx. 44 g
Material:	ABS & Polycarbonate
Operational life:	24 hours
Service life:	5 years
Light intensity:	over 0.75 cd
Flash frequency:	50–70 flashes per minute
Operational water temp:	-1°C to 30°C
Op. environmental temp:	-30°C to +65°C

Certificates and Standards

- Wheelmark
- DNV
- UK MER Redesign
- SOLAS/MED

Product Information

Art. no.:	LJL-W4A
IMPA:	330143
HS Code:	85131000

Features and Contents

The manufacturing and expiry dates are indicated on the label.

During the annual ship service, it is recommended to briefly activate the lights. Automatic lights should not be stored in humid or wet conditions to prevent accidental activation. Used or expired lights should be disposed of in accordance with local regulations.

Comes with a user manual.



T-ISS™
safety suppliers

a Heijboer Safety Group company